

## EasyLED Series

### EasyLED Flat Top Bollard with IES Type III Glass



**BOFG3Q**

#### Housing:

Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat Top, Powdercoat Finish Over a Chromate Conversion Coating, Internal Ballast Tray for Easy Maintenance

#### Refractor:

IES Type III Clear Prismatic Borosilicate Glass Refractor

#### Lens:

Clear Polycarbonate Lens

#### Mounting:

Mounting Kit with 8" Anchor Bolts (Included).

#### LumaFit LED:

Array Lumens: 2089

CRI: 83

CCT: 5000K

Rated Life: 50,000 Hours

5-Year Warranty

Aluminum Boards

#### Wattage:

Array: 14.5w, System: 17w

#### Driver:

Electronic Driver, 120-277V, 50/60Hz

Dimmable Driver

#### Listing & Ratings:

CSA: Listed for Wet Locations

#### Options:

2.5KV Surge Protection

Custom Colors Available Upon Request.

Bollards Can Be Cut To Custom Lengths Upon Request.



### EasyLED Flat Top Bollard with IES Type III Glass

Catalog #


Description

#### Complete Units

#### Ordering Information

Example: BOFG3QF1X15U5KZSP

BOFG3	Model:	BOFG3
Q	LED Mfr:	Q=QSSI
F	Optics:	F=Medium Beam Spread
1X	Number of Arrays:	1X=One
15	Wattage:	15=15w
U	Ballast:	U=120-277V
5K	CCT:	5K=5000K
Z	Color:	Z=Bronze, W=White, B=Black
-	Mounting:	N/A
SP	Options:	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

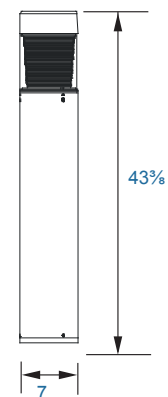

**BOFG3Q**