

EasyLED Series

EasyLED Square Bollard with IES Type III Glass



BOSFG3Q

Housing:

Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Flat Top, Powdercoat Finish Over a Chromate Conversion Coating, Internal Ballast Tray for Easy Maintenance

Refractor:

IES Type III Clear Prismatic Borosilicate Glass Refractor

Lens:

Clear Polycarbonate Lens

Mounting:

Mounting Kit with 8" Anchor Bolts (Included).

LumaFit LED:

Array Lumens: 2089

Delivered Lumens: 1151

CRI: 83

CCT: 5000K

Rated Life: 50,000 Hours

5-Year Warranty

Aluminum Boards

Wattage:

Array: 14.5w, System: 17w

Driver:

Electronic Driver, 120-277V, 50/60Hz

Dimmable Driver

Listing & Ratings:

CSA: Listed for Wet Locations

Options:

2.5KV Surge Protection

Custom Colors Available Upon Request.

Bollards Can Be Cut To Custom Lengths Upon Request.



EasyLED Square Bollard with IES Type III Glass

Catalog #


Description

Complete Units

Ordering Information

Example: BOSFG3QF1X15U5KZSP

Catalog #	Model:	Description
BOSFG3	Model:	BOSFG3
Q	LED Mfr:	Q=QSSI
F	Optics:	F=Medium Beam Spread
1X	Number of Arrays:	1X=One
15	Wattage:	15=15w
U	Ballast:	U=120-277V
5K	CCT:	5K=5000K
Z	Color:	Z=Bronze, W=White, B=Black
-	Mounting:	N/A
SP	Options:	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

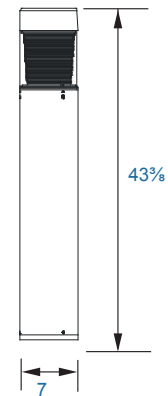

BOSFG3Q