

# BRADFORD COLLECTION




## SPECIFICATIONS

- 120V INPUT VOLTAGE, 50/60Hz
- HIGH POWER FACTOR
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +50°C (122°F)
- ESTIMATED 50,000 HRS L<sub>70</sub>\*
- 5 YEAR WARRANTY
- DIMMABLE
- MOLDED OF DURABLE NON-CORROSIVE UV RESISTANT RESINS
- ACRYLIC DIFFUSER
- FITS MOST 3 INCH DIAMETER POSTS (NOT INCLUDED)
- UL LISTED FOR WET LOCATIONS
- STANDARD PACK QTY: 1



RoHS compliant

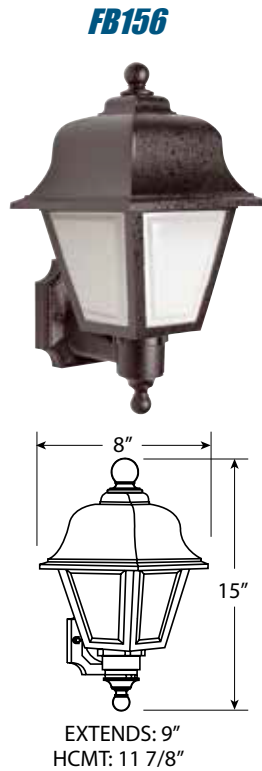

**PATENT PENDING**  
EOS LIGHT ENGINE

EXAMPLE # FB156-LE800C-BW

STYLE #	SOURCE/WATTAGE	LUMENS/CCT	BODY	LENS	OPTIONS
FB255 = POST	LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT **	W = 900lm 3000K C = 1000lm 4000K	B = BLACK W = WHITE	C = CLEAR W = WHITE F = FROSTED	
FB155 = LONG FB156 = SHORT	LE800 = 13W POWER INPUT CRI = 80 (TYP) >65 LUMENS PER WATT **	W = 900lm 3000K C = 1000lm 4000K	B = BLACK W = WHITE	C = CLEAR W = WHITE F = FROSTED	P = PHOTOCELL

LE800 LED REPLACEMENT PARTS	
L08-AC120R-W	= 900 LUMEN 3000K ARRAY
L08-AC120R-C	= 1000 LUMEN 4000K ARRAY

\* DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST  
\*\* ESTIMATED FROM LED SOURCE

