

On the Ceiling...

LED Clouds: LL300 Series



CLOUD CEILING FIXTURES

SPECIFICATIONS

- 120V INPUT VOLTAGE, 50/60Hz
- CONSTANT CURRENT
- AMBIENT OPERATING TEMPERATURE -40°C (-40°F) TO +50°C (122°F)
- ESTIMATED 50,000 HRS L₇₀*
- WHITE POWDERCOATED ALUMINUM BASE AND ACRYLIC DIFFUSER
- CEILING MOUNT ONLY
- UL/CUL LISTED FOR DAMP LOCATION
- DIMMABLE
- STANDARD PACK QTY: 8 (11" MODEL) or 6 (14" MODEL)





FD321
FD324
MUSHROOM



FD311
FD314
DRUM

RoHS
compliant

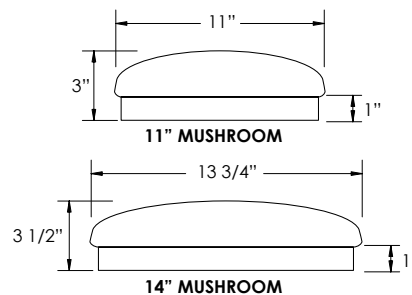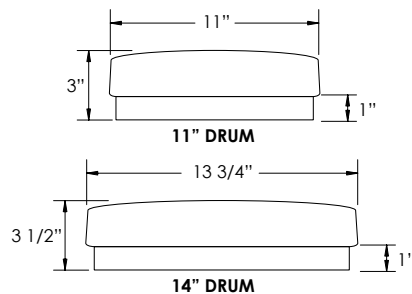

PATENT PENDING
Eos LIGHT ENGINE

EXAMPLE # FD311-LE800W-WW

STYLE #	SOURCE/WATTAGE	COLOR TEMP	BODY	LENS
FD311 = 11"DRUM FD321 = 11"MUSHROOM	LE800 = 12W POWER INPUT 800 LUMENS >65 LUMENS PER WATT **	C = 3000K W = 4000K	W = WHITE	W = WHITE
FD314 = 14"DRUM FD324 = 14"MUSHROOM	LE1200 = 15W POWER INPUT 1200 LUMENS >80 LUMENS PER WATT **			
	LE1800 = 22W POWER INPUT 1800 LUMENS >80 LUMENS PER WATT **			