

PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.

TYPE: _____ DATE: _____

JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

PEGW


LED Wide Enclosed and Gasketed

FEATURES

- Vaportight design
- IP67 Certified (comparable to NEMA 6)
- NEMA 4X rated / NEMA 250-2003
- NSF / ANSI Standard 2
- UL50E: standards for safety enclosures of electrical equipment
- 12 Point stainless steel latching and stainless hardware
- Sloped housing design promotes water displacement
- Optional stainless steel "V" bracket or "SB" surface bracket accessory
- RoHS Compliant
- HOUSING - The inner gear tray is constructed of code gauge steel. The outer housing is constructed of fiberglass reinforced polyester. Gasketing in the housing is constructed of closed cell polyurethane. Conduit entrance provisions are located on each end. All external hardware and hanging components are constructed of stainless steel.
- LENS - Frosted, injection molded, high impact acrylic is standard. An optional clear lens is also available
- ELECTRICAL - Universal voltage (120-277 Vac) input, 50/60Hz.
- Power factor > 0.9, THD <20%, in-rush current < 15 Amps
- DRIVER - High-performance isolated driver features over-voltage, over-current and shortcircuit (with auto-recovery) protection. Driver module is sealed to IP66 protection levels, with a Class A sound rating. 0-10 volt dimming standard. OPERATING TEMPERATURE - -30°C to 35°C (-22°F to 95°F)
- FINISH - All metal parts are painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of housing reflecting surfaces is with high-reflectance (minimum 92%) polyester powder



DIMENSIONS

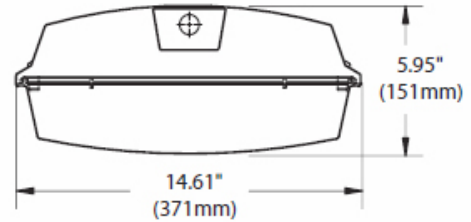

LIGHT OUTPUT - LED EGW

	Lumens (Nominal)			W
	CW	NW	WW	
HO	6350	5670	5760	57
VHO	10120	9310	9150	88

WARRANTY & LISTINGS

- WARRANTY - Limited 5-year warranty
- Listed to UL 1598 and other U.S. and Canadian safety standards



ARRA
Funding Compliant



ACCESSORY ORDERING INFO

ACCESSORY ORDERING INFORMATION	
Description	Order Number
Stainless Suspension Hangers ("V" Hook) (Pair)	EGWVB
Cable Hanging Set with Loop 10 ft. (pair)	LCH10
Cable Hanging Set with Loop 20 ft. (pair)	LCH20
Stainless Steel Surface Bracket	EGWSB

ORDERING INFORMATION: EXAMPLE: PEEGW4SLEDHOCWUE

MODEL	LENGTH	DISTRIBUTION	LIGHT SOURCE	DRIVE CURRENT	COLOR TEMP	LINE VOLTAGE	OPTIONS
PEGW = LED Wide Enclosed & Gasketed	4	S = SYMMETRIC	LED	HO = HIGH OUTPUT VHO = VERY HIGH OUTPUT	CW - Cool White NW - Neutral White WW - Warm White	UE = Universal Voltage (120-277V)	CL = Clear Lens W6C1631 = 6-foot, 16 gauge, 3 conductor cord with Wet Location fitting W6C1641 = 6-foot, 16 gauge, 4 conductor cord with Wet Location fitting W6C1651 = 6-foot, 16 gauge, 5 conductor cord with Wet Location fitting HUB = 3/4" N.P.T. HUB IN BACK / TOP (Damp Location Rated Only) LT = Lens Safety Teather EM = 1100 Lumen Emergency Battery Pack

215-512-8100 • Fax 267-288-5604
421 Bustleton Pike, Feasterville, PA 19053
www.proliteled.com

Specifications subject to change without prior notice.
© 2016, PROlite LED Lighting, Inc. ALL RIGHTS RESERVED