



PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.

TYPE: _____ DATE: _____

JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

PLEDSL28W

28 Watt LED Landscape Security / Flood Light

FEATURES

- Available in 3000k & 5000k (cool white) color temperatures*
- Long-life LEDs provide 69,000 hours of operation with at least 70% of initial lumen output (L70)**
- Delivers 2,724 lumens (106 lumens per watt, LPW) at 3000k, and 3,200 lumens (125 LPW) at 5000k*
- Narrow beam spread is standard. Medium beam spread is available by special order (contact factory for details)
- Universal 100-277 AC voltage (50-60Hz) is standard
- Power factor > 0.90
- Total harmonic distortion < 20%
- Color rendering index > 80
- Die cast aluminum housing with durable, dark bronze, powder coat paint
- Polycarbonate lens
- Several mounting options provide easy installation in new construction or retrofit. Yoke-mounted models available by special order (contact factory for details)

*Contact factory for other color temperatures and lumen packages

**L₇₀ hours are IES TM-21-11 calculated hours

WARRANTY & LISTINGS

- cULus listed for wet locations (-20°C to 40°C / -4°F to 104°F)
- IP65 rated
- DLC approved
- Complies with EN61000-4-5, surge immunity test (1kV)
- 5-year warranty on all electronics and housing



The PLEDSL15W landscape security / flood light is an ideal solution for general site, landscape, sign and pathway lighting. With a die cast aluminum housing, and a polycarbonate lens with seamless silicone gasket to prevent leaks, the PLEDSL15W will stand up to many years of punishing environmental conditions. High-efficacy, long-life LEDs provide both energy and maintenance cost savings compared to traditional, incandescent landscape lights.

MOUNTING OPTIONS

- Threaded pipe (NPS 1/2"), which attaches to a junction box, is standard
- Optional spike-mount (LEDSL-BS) for ground mounting
- Optional canopy-mount (LED-CNY-KIT) for attachment to flat surfaces




Spike-Mount (LEDSL-BS)



Canopy-Mount (LED-CNY-KIT)

DIMENSIONS




ORDERING INFORMATION

MODEL	LUMINAIRE WATTS	LUMINAIRE LUMENS	LUMENS PER WATT	COLOR TEMPERATURE	BEAM SPREAD	MOUNTING OPTIONS (Order Separately)
PLEDSL28W-K-3K-30	26	2,724	106	3K = 3000k	30 = Narrow	Spike-Mount = LEDSL-BS Canopy-Mount = LED-CNY-KIT
PLEDSL28W-K-5K-30	26	3,200	125	5K = 5000k	30 = Narrow	

215-512-8100 • Fax 267-288-5604
421 Bustleton Pike, Feasterville, PA 19053
www.proliteled.com

Specifications subject to change without prior notice.
© 2016, PROlite LED Lighting, Inc. ALL RIGHTS RESERVED



PROlite LED Lighting™

A Division of Emergensee® Lighting, Inc.

TYPE: _____ DATE: _____

JOB NAME: _____

CONTRACTOR: _____

CATALOG NO: _____

NOTES: _____

ELECTRICAL DATA

MODEL	COLOR TEMP	CRI ¹	LUMINAIRE LUMENS	LUMINAIRE WATTS	LUMENS PER WATT	INPUT VOLTAGE	INPUT CURRENT (A)			POWER FACTOR	THD ²	L ₇₀ HOURS ³
							120V	240V	277V			
PLEDSL28W-K-3K-30	3000K	> 80	2,724	26	106	120-277 (50-60Hz)	0.21	0.11	0.09	> 90%	< 20%	69,000
PLEDSL28W-K-5K-30	5000K	> 80	3,200	26	125	120-277 (50-60Hz)	0.21	0.11	0.09	> 90%	< 20%	69,000


¹ Color rendering index

² Total harmonic distortion

³ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

LED28W-K-5K-30 (3,200 Lumens)

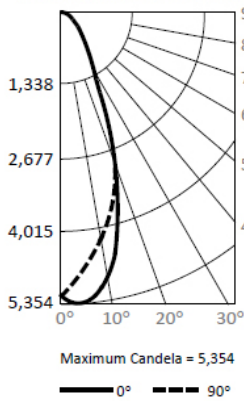



Candlepower Summary

	0°	90°
0°	5,198	5,198
10°	5,305	5,102
20°	4,897	4,614
30°	4,046	4,017
40°	2,854	3,008
50°	1,794	2,022
60°	1,191	1,382
70°	834	969
80°	614	721
90°	456	537

Zonal Lumen Summary

Zone	Lumens	% Fixture
0° - 10°	450	14.1%
0° - 20°	1,356	42.4%
0° - 30°	2,065	64.5%
0° - 40°	2,545	79.5%
0° - 50°	2,870	89.7%
0° - 60°	3,060	95.6%
0° - 70°	3,155	98.6%
0° - 80°	3,192	99.7%
0° - 90°	3,199	100.0%
90° - 180°	1	0.0%
0° - 180°	3,200	100.0%

Cone of Light

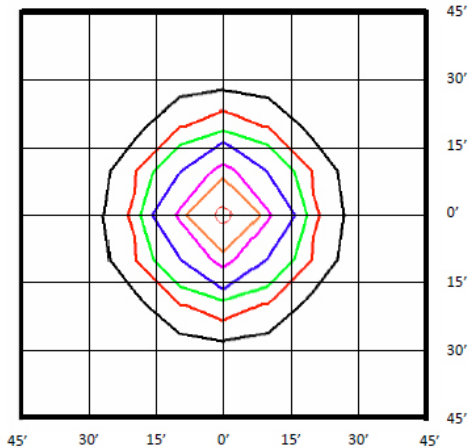

- Foot Candles
- 5.0
 - 2.0
 - 1.0
 - 0.5
 - 0.2
 - 0.1

Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 25 feet.

Luminaire Orientation

